



FIG.1

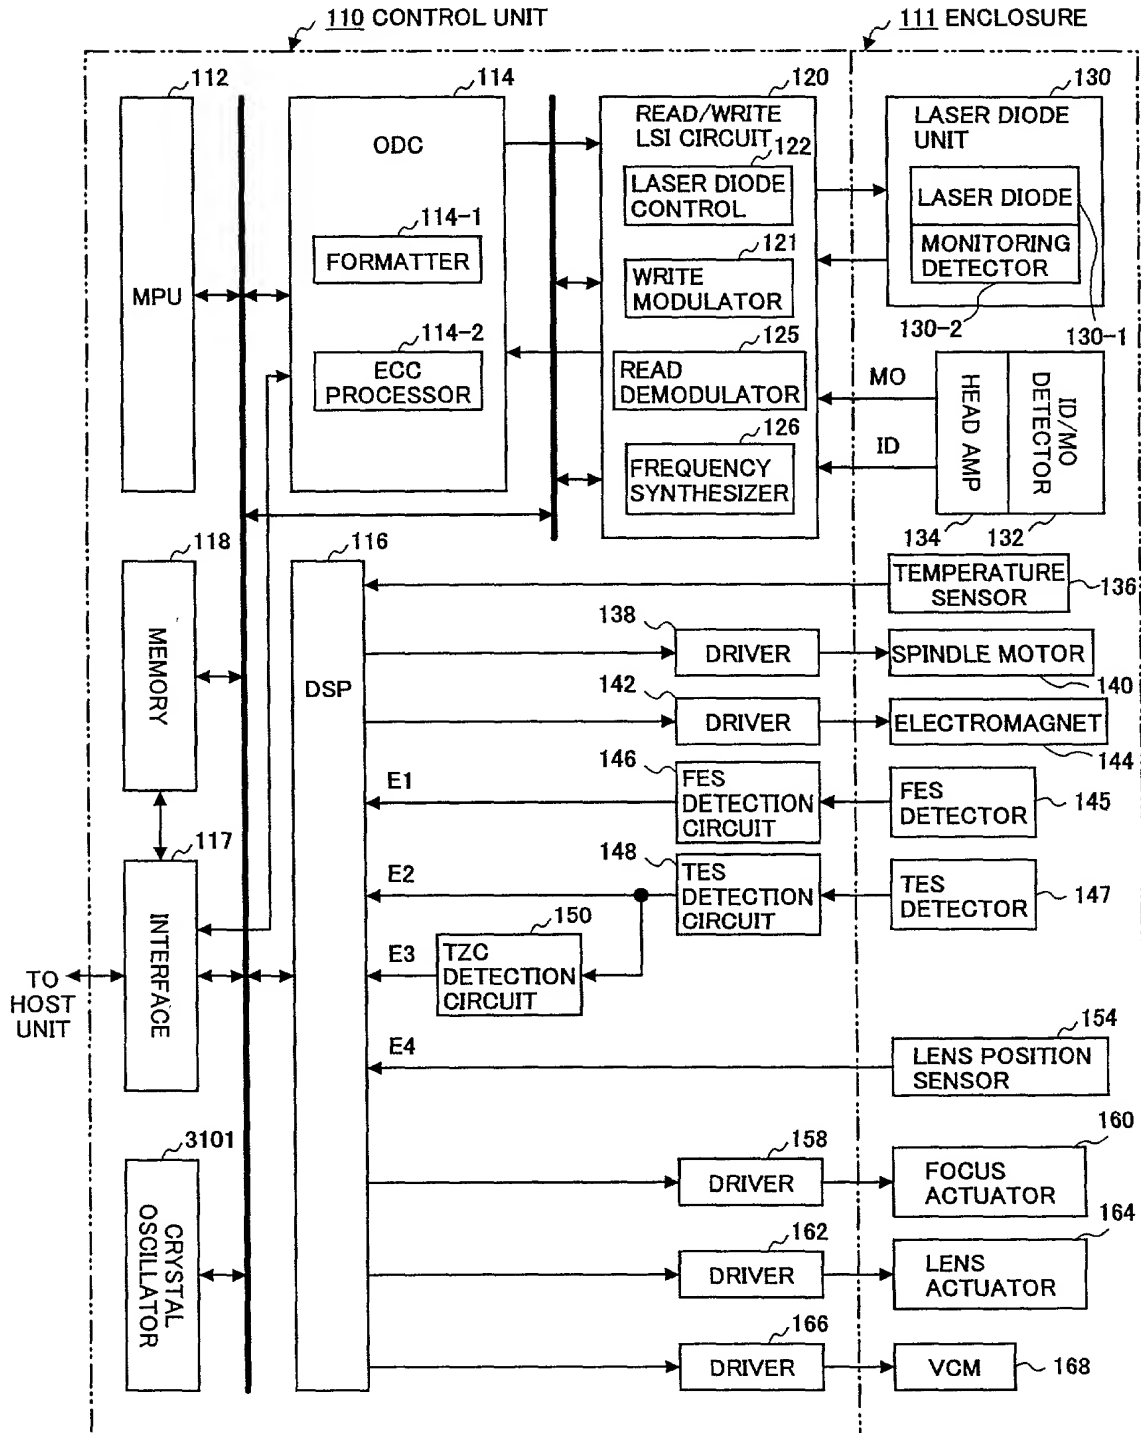


09564056-092601

FIG. 2

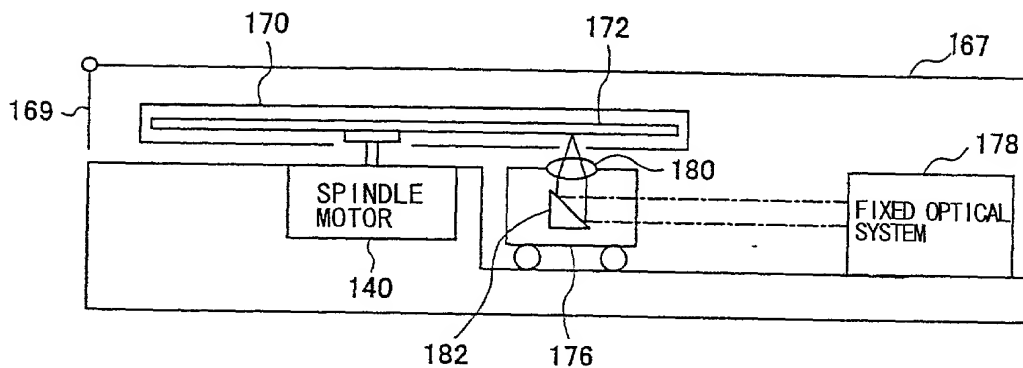

094165870 360 0080

FIG.3

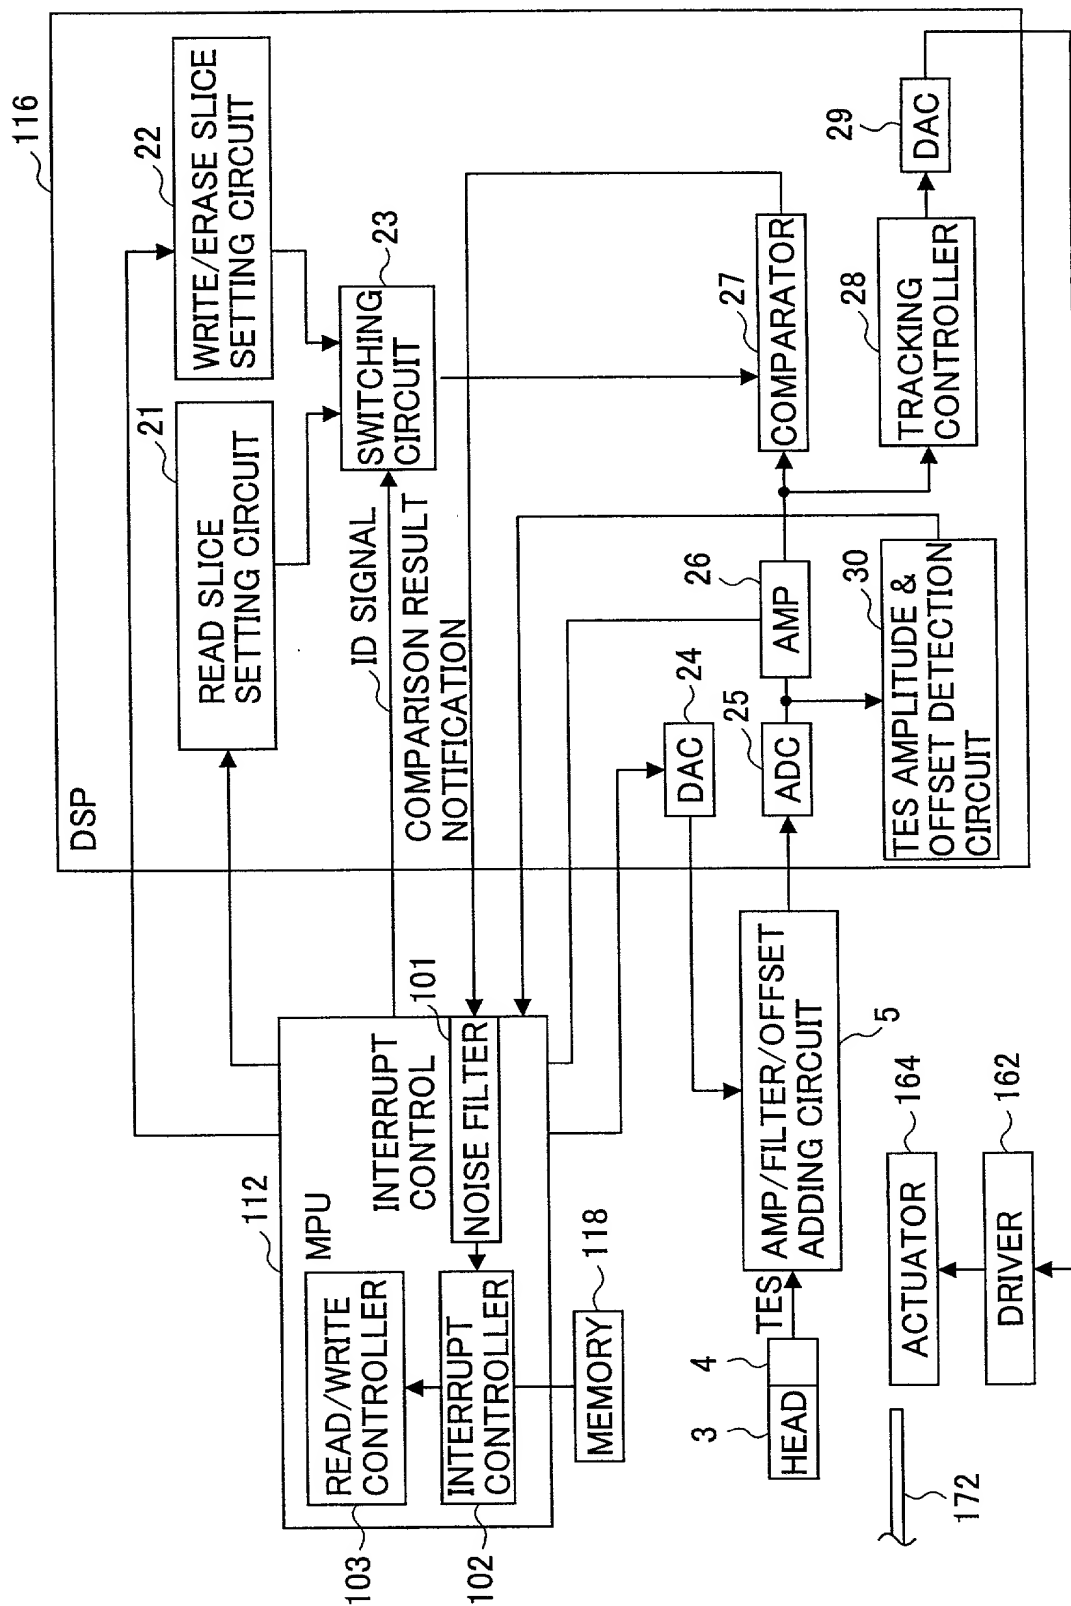

0904050708091011





FIG.5

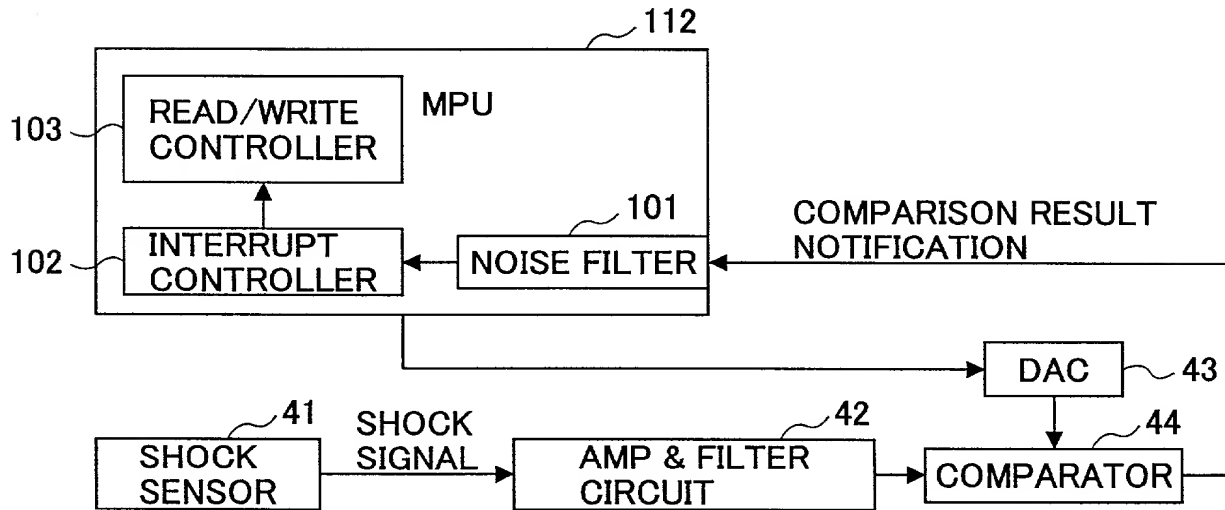

0941.65870 - 09260

FIG.6


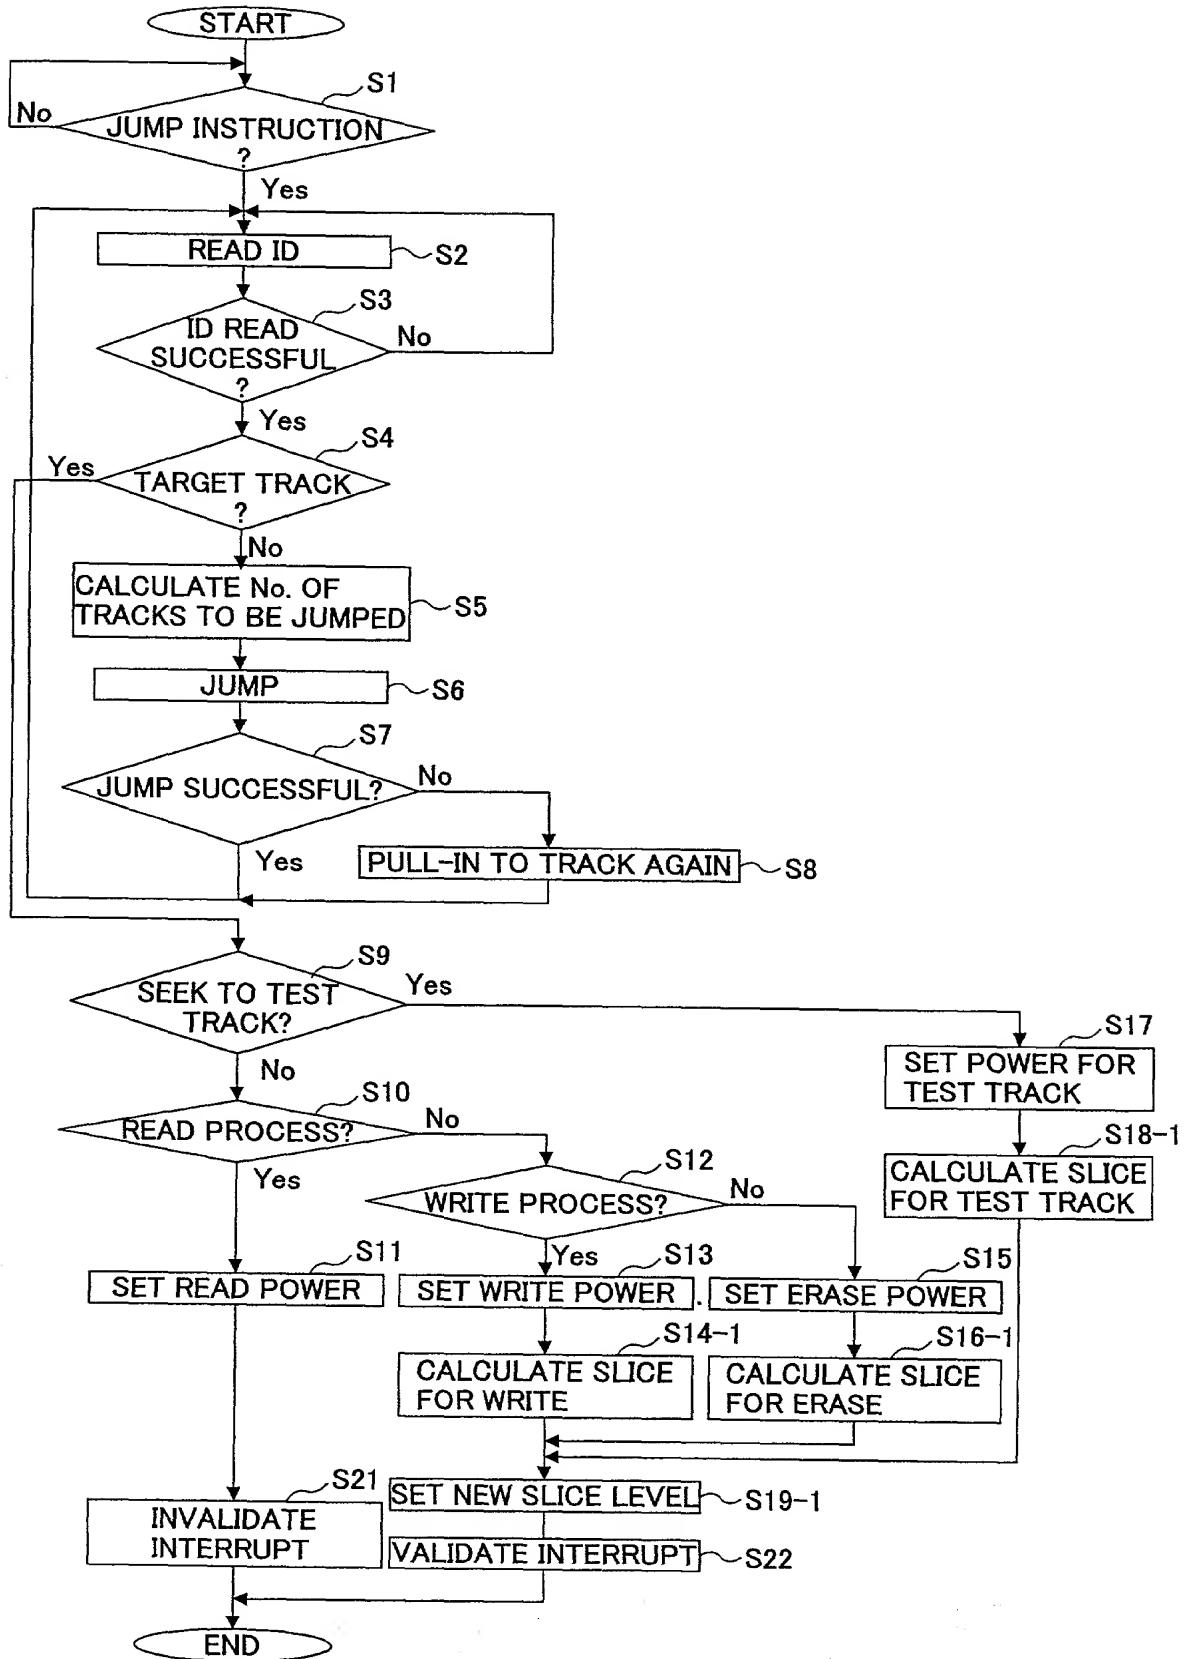


FIG.7

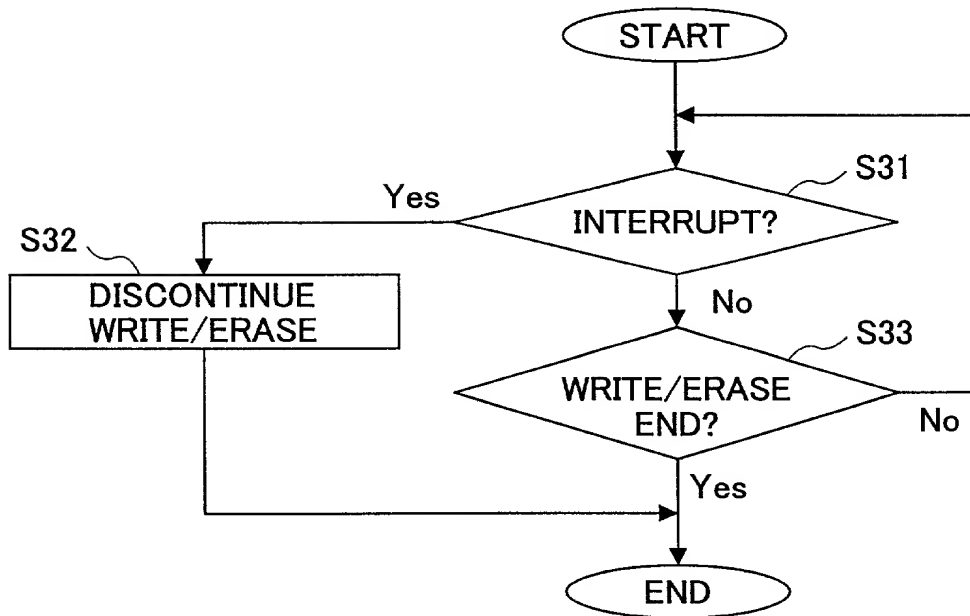


00964056-00260-95049660

FO9260-95049660

FIG.8


RETRY COUNTER	OPTIMUM WRITE POWER [%]	SLICE LEVEL [μ m] FOR DETECTING OFF-TRACK	OFF-TRACK DETECTION TIME CONSTANT [μ s]	WRITE SLICE LEVEL [m/s ²] FOR DETECTING SHOCK	SHOCK DETECTION TIME CONSTANT [μ s]
5	-3	0.08	6.3	31.4	6.3
3	-2	0.07	5.9	27.4	5.9
1	-1	0.06	5.5	23.5	5.5
0	0	0.05	5	19.6	5
2	+1	0.04	4.5	15.7	4.5
4	+2	0.03	3.9	11.8	3.9
6	+3	0.02	3.2	7.8	3.2

FIG.9

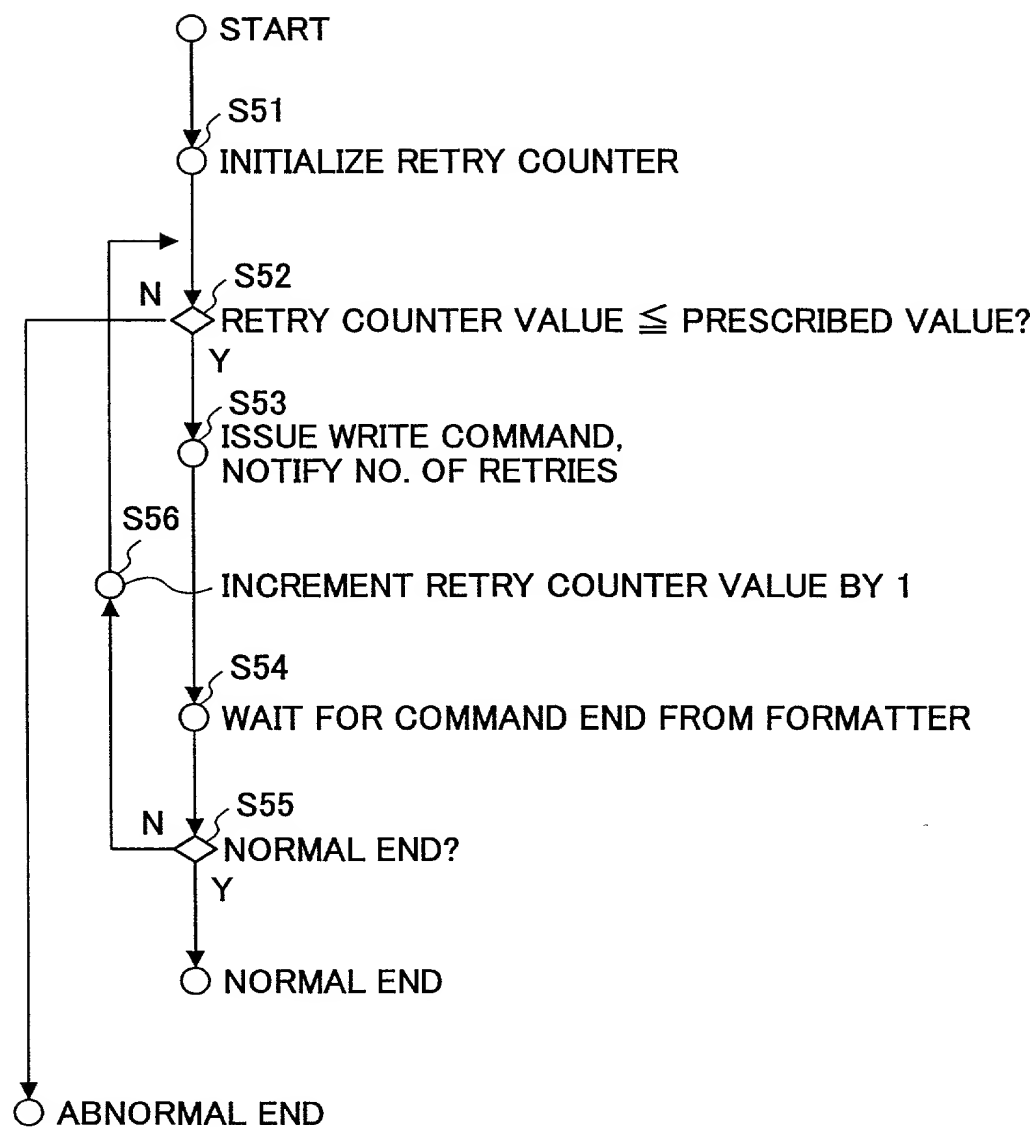

096456-95049660

FIG.10

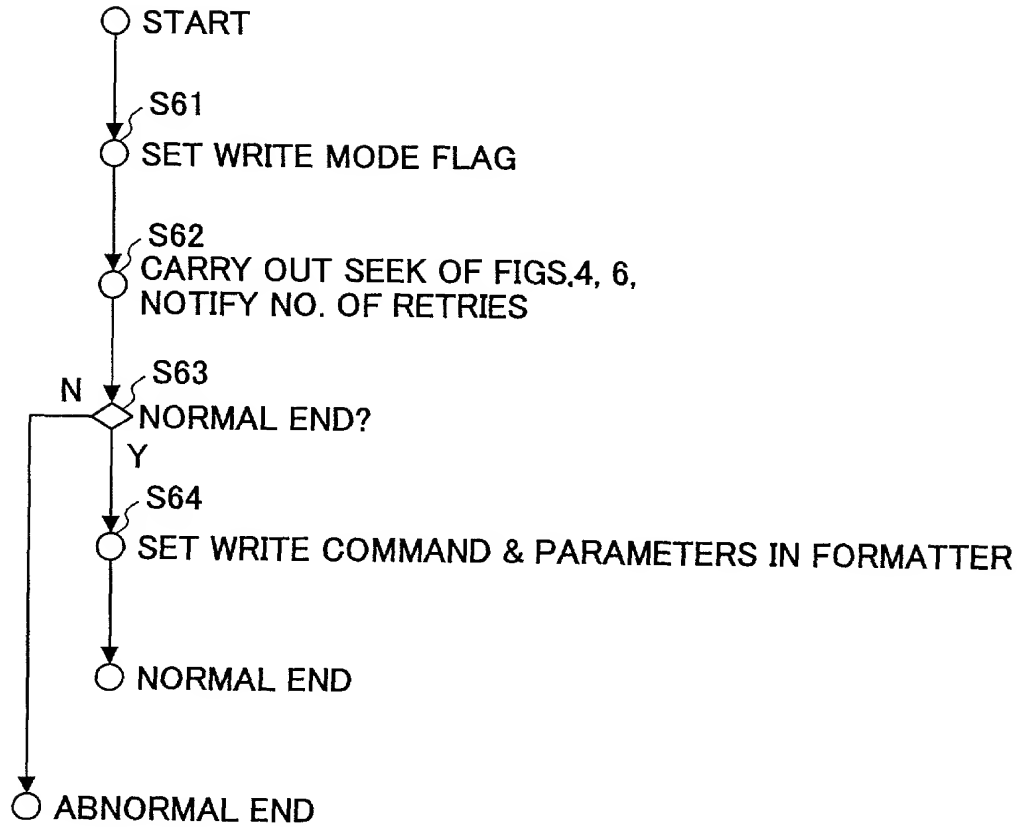

094165870 360 0080